

Konnex - Depth 20cm

Installation





Konnex – Depth 20cm

Please note that a set of shelves may be loaded with a maximum of 20 kg.

Scope of delivery (1 set)

1 Shelf unit small	(31 x 20 cm, 3 Grids)
1 Shelf unit medium	(41 x 20 cm, 4 Grids)
1 shelf unit large	(51 x 20 cm, 5 Grids)

Wall mounting optionally available, recommended 4x per initial set

Contents:	Shelf support 150mm white (wall mounting)	1 pc.
	O-ring 10x2	2 pcs.
	Washer white	1 pc.
	Dowel 8mm with hanger bolt	1 pc.
	Stop buffer	4 pcs.

Tools required:

- Drill and 8mm masonry drill bit
- 10mm open-end spanner or pliers
- Torx screwdriver size 15
- Pencil
- Spirit level
- Folding rule



Fitting the wall mounting for the first shelf unit

You will need two wall brackets for the first shelf unit.

Ideally, the wall mounting should be fitted in the corners of the shelf unit. Mark the desired position of the shelf at the upper inside corners on the wall and measure **11 mm horizontally** and **9 mm vertically** inwards from the inside of the corner and drill an 8 mm dowel hole as horizontally as possible.

This results in an intermediate dimension between the drilling positions of **278, 380 or 482 mm**, depending on the shelf size.

Mount the two wall brackets in the 8 mm dowel holes.



You can screw the screw into the dowel (Torx tip required) or first connect the screw to the holder and then screw both into the dowel by hand.

Now slide the shelf onto the wall brackets and align the shelf element horizontally using a spirit level and the wall brackets. Make sure that the slots in the shelf are facing forwards. The wall bracket has a ± 2 mm height adjustment. To do this, turn the bracket to the desired height using the spanner (see illustration).






Installing the other wall fixings

A wall bracket is provided for each additional element. Determine the distances between the holes for the wall brackets according to the following rules (see example):

- 1 grid dimension (distance between the slots) corresponds to 10.2 cm.
- Always measure from the top edge and the outside of the 1st shelf unit
- If the next wall bracket sits above the brackets of the 1st unit, subtract 15 mm from the grid dimension
- If the wall bracket sits below the brackets, add 15 mm
- If the wall bracket sits to the left of the bracket of the 1st element, subtract 17 mm from the grid dimension
- If the wall bracket sits to the right of the brackets, subtract 11 mm from the grid dimension

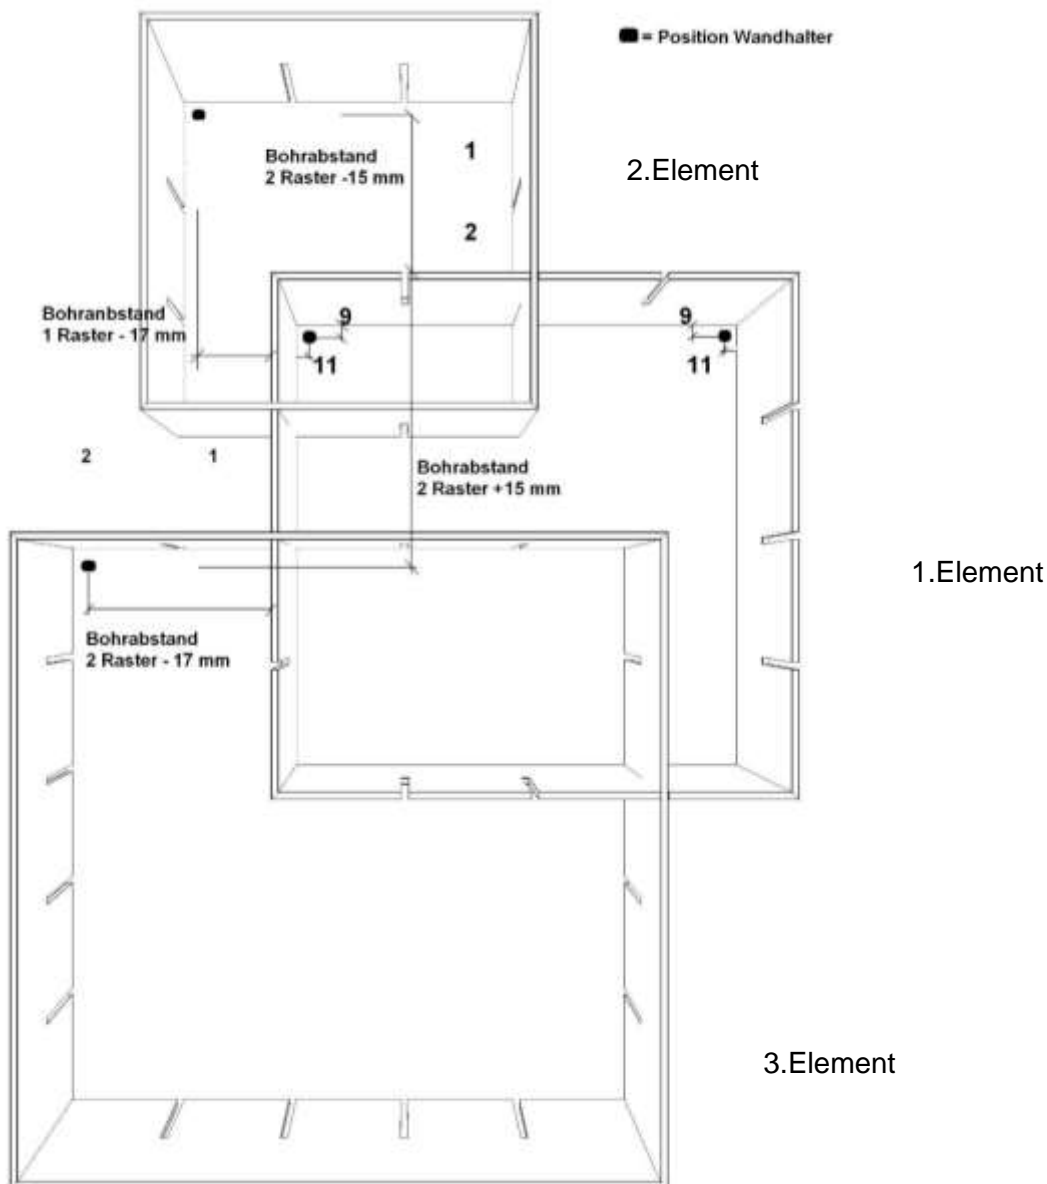



Grid dimensions:

1	Grid =	102	mm
2	Grid =	204	mm
3	Grid =	306	mm
4	Grid =	408	mm
5	Grid =	510	mm
6	Grid =	612	mm

u.s.w

Now fit the wall brackets as described above.

3

Fastening the other shelf units

You can now slide the other shelving elements onto the support and into the slots of the already assembled shelving in the desired order. If necessary, adjust the height of the supports.

If you are fitting additional shelving units, proceed as described from step 2. Please note that, depending on the direction of the slots, two units may need to be inserted into each other before wall mounting.

Thank you very much and we hope you enjoy your Konnex.



